

follower

ATS 2000 SRW

EAC & CE
CERTIFICATE



SPARE PART
SUPPORT



%70 POWER
ECONOMY




24 MONTHS
GUARANTEE



RENEWABLE
MACHINE



HIGH
SAFETY

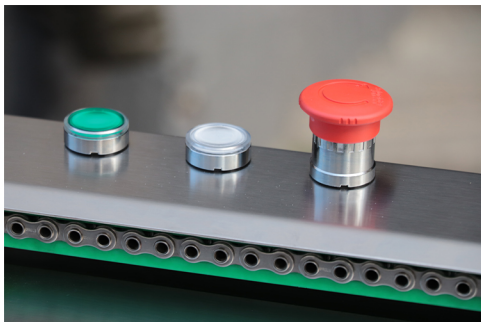

ATS 2000 SRW

Completely made of stainless steel. The mold and aluminum parts are eloxal coated. Values can be monitored numerically and graphically with the touch operator panel and any action can be done easily. The pneumatic system, gas pressure and vacuum values are controlled by sensors on the machine and operator is directed by warning message on display. The machine has printed film, non-printed film options and photocell system. Easy to replace mold system provides low mold cost effectiveness, unlimited mold choice and high performance for line type MAP packaging.



follower

ATS 2000 SRW

Technical Specifications

INSTALLED POWER	400V 50HZ 40A R.S.T.N.PE
ENERGY CONSUMPTION	4,5 KW
VACUUM PUMP	100 M3
AIR CONSUMPTION	4,5 LT CYCLE
AIR PRESSURE	MAX. 6 BAR
MACHINE DIMENSIONS	2000X1060X1400+500
CAPACITY/MIN	4-10 PROCESS
WEIGHT NET/PACKAGED	650 KG, EXCEPT THE PUMP
MAX. FILM WIDTH	450 MM
MAX. PLATE DEPTH	100 MM
INFEEED BAND	1000 MM
MIN. FILM THICKNESS	40 MIC
DISCHARGE BAND	300 MM
MAXIMUM FILM WEIGHT	16 KG
MAX. MOLD DIMENSIONS	420X310 MM STANDARD

MAXIMUM PLATE SIZE

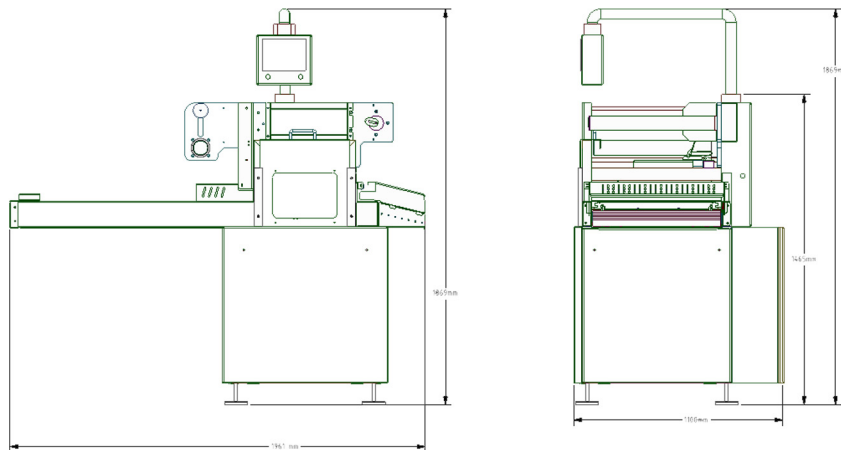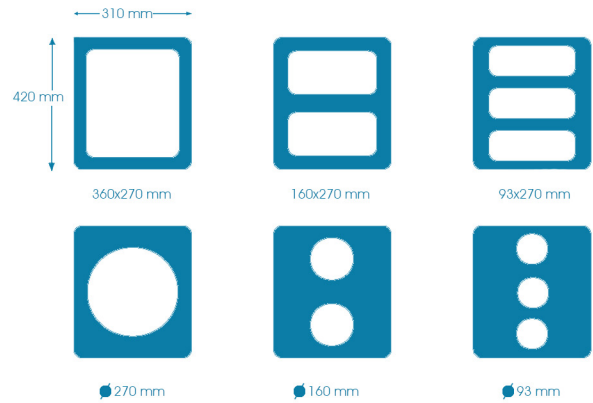

ATS 2000 SRW Advantages

Line type solution on vacuumed and gaseous plate closing	Automatic filling and magazine can be integrated into feed band	10 inch Touch screen Operator panell and adjustable panell box	MAP & SKIN PACKAGING option
Values are monitored numerically and graphically	The vacuum pump of 100 m3 DVP	Precise measurement control with digital absolute vacuum sensor	User-friendly with automatic operation counter and other safety and warning sensors
Possibility of only welding and cutting by one-touch	Photocell unit to use printed film	Stainless steel body of quality 304	Eloxal coated aluminum parts
Automatic film adjustment and waste film discharge system	Completely cuts the film around the plate and does not need extra labor	Energy saving with automatic temperature control system	Very easy to transport by stainless steel wheels